

ATG C



MILANO 630 BLK/WHT

Armadio murale statico con agitatore
 Temperatura normale
 Ventilated multideck cooler
 Positive temperature



Colori disponibili / Available colors

<input type="radio"/>	Bianco / White
<input type="radio"/>	Nero / Black



ATG B



SMART LINK WIFI

MILANO 1270 BLK/WHT

Armadio murale doppia porta ventilato
 Temperatura normale
 Ventilated double door multideck cooler
 Positive temperature



Colori disponibili / Available colors

<input type="radio"/>	Bianco / White
<input type="radio"/>	Nero / Black



ATG B

MILANO 1620 BLK/WHT

Armadio murale tre porte ventilato
 Temperatura normale
 Ventilated three door multideck cooler
 Positive temperature



Colori disponibili / Available colors

<input type="radio"/>	Bianco / White
<input type="radio"/>	Nero / Black

Porta a sfioro senza cornice
 Full glass frameless door



Regolatore di temperatura elettronico
 Electronic controller

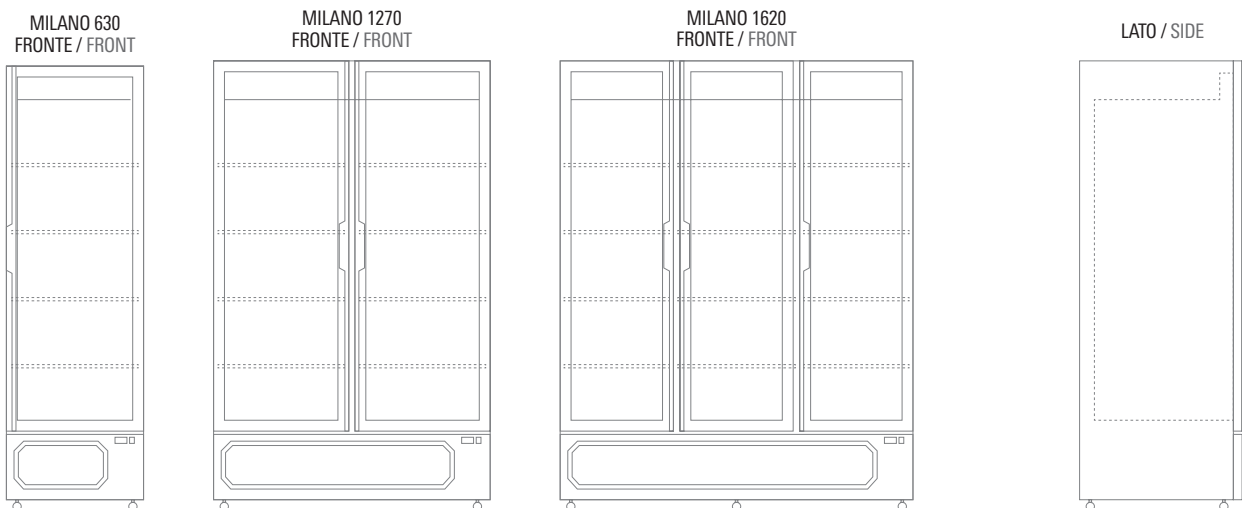


Illuminazione led
 Led lighting



Caratteristiche / Features

Modello / Model	MILANO 630 BLK/WHT	MILANO 1270 BLK/WHT	MILANO 1620 BLK/WHT
Temperatura / Temperature Range	+1 °C / +10 °C	+1 °C / +10 °C	+1 °C / +10 °C
Classe Climatica / Climate Class	4	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 527 / 551	Lt. 1095 / 1215	Lt. 1420 / 1560
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Termometro / Thermometer	Digitale / Digital	Digitale / Digital	Digitale / Digital
Regolatore temperatura / Controller	Elettronico / Electronic	Elettronico / Electronic	Elettronico / Electronic
Smart Link WiFi	Optional	Optional	Optional
Controllo remoto / Remote controller			
Spessore isolamento / Insulation thickness	mm 45	mm 45	mm 45
Sbrinamento / Defrost	Automatico a fermo compressore Automatic compressor cycle	Automatico a fermo compressore Automatic compressor cycle	Automatico a fermo compressore Automatic compressor cycle
Illuminazione / Lighting	2 Led verticali / vertical	3 Led verticali / vertical	4 Led verticali / vertical
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes	Si / Yes
Mensole (LxP) / Shelves (WxD)	N° 4 - mm 529 x 543	N° 8 - mm 580 x 543	N° 8 - mm 484 x 543 lat / lateral N° 4 - mm 540 x 543 cen / middle
Piedi-Ruote / Feet-Rollers	4 Ruote / 4 Rollers 2 Piedini / 2 Feet	4 Ruote / 4 Rollers 2 Piedini / 2 Feet	6 Ruote / 6 Rollers 3 Piedini / 3 Feet
Peso Netto-Lordo / Net Weight	Kg 89 / 101	Kg 205 / 220	Kg 265 / 280
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290	R290
Assorbimento / Absorption	W 130	W 300	W 504
Consumo Energia / Energy Consumption	KwH/24H 3,1	KwH/24H 7,35	KwH/24H 9,21


Dimensioni mm / Dimensions mm

Modello / Model	MILANO 630 BLK/WHT	MILANO 1270 BLK/WHT	MILANO 1620 BLK/WHT
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	630 x 793 x 2041	1270 x 740 x 2065	1620 x 740 x 2065
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	640 x 845 x 2125	1280 x 778 x 2152	1630 x 778 x 2152

Dimensioni Interne mm / Inner Dimensions mm

A - Larghezza / Width	544	1184	1534
B - Profondità / Depth	638	638	638
C - Altezza / Height	1594	1594	1594

Dimensioni Personalizzazione (LxH) mm / Sticker Dimensions (WxH) mm

Lato / Side	674 x 2006	674 x 2006	674 x 2006
Vetro / Glass	521 x 1602	521 x 1694	424 x 1694