



MR 75 BT1

Armadio murale no frost
Bassa temperatura
No frost multideck freezer
Negative temperature



MR 126 BT2

Armadio murale doppia porta no frost
Bassa temperatura
No frost double door multideck freezer
Negative temperature



MR 188 BT3

Armadio murale tre porte no frost
Bassa temperatura
No frost three door multideck freezer
Negative temperature



Motoventola assiale
Axial fan motor



Regolatore di temperatura elettronico
Electronic controller

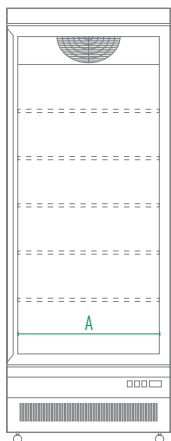
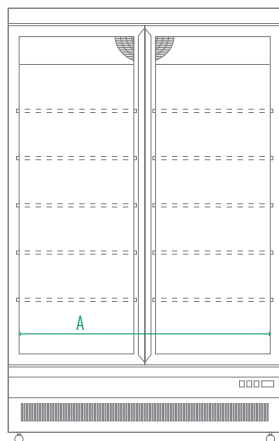
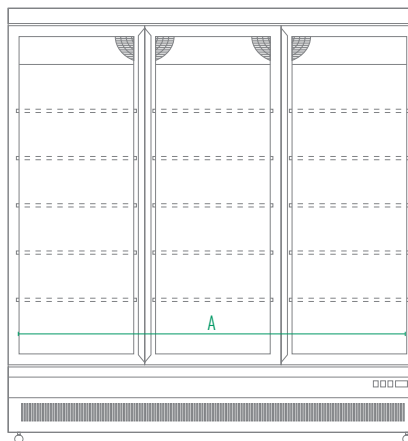
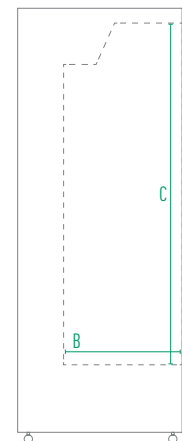


Mensole
Shelves



Caratteristiche / Features

Modello / Model	MR 75 BT1	MR 126 BT2	MR 188 BT3
Temperatura / Temperature Range	-18 °C / -22 °C	-18 °C / -22 °C	-18 °C / -22 °C
Classe Climatica / Climate Class	3	3	3
Volume Netto-Lordo / Net-Gross Volume	Lt. 425 / 560	Lt. 780 / 930	Lt. 1200 / 1450
Superficie Esterna / Body	Acciaio verniciato Painted steel	Acciaio verniciato Painted steel	Acciaio verniciato Painted steel
Superficie Interna / Inner Liner	Alluminio verniciato Painted aluminium	Alluminio verniciato Painted aluminium	Alluminio verniciato Painted aluminium
Termometro / Thermometer	Digitale / Digital	Digitale / Digital	Digitale / Digital
Regolatore temperatura / Controller	Elettronico / Electronic	Elettronico / Electronic	Elettronico / Electronic
Smart Link WiFi Controllo remoto / Remote controller	Optional	Optional	Optional
Spessore isolamento / Insulation thickness	mm 60	mm 60	mm 60
Sbrinamento / Defrost	Automatico a gas caldo + Manuale Automatic with hot gas system + Manual	Automatico a gas caldo + Manuale Automatic with hot gas system + Manual	Automatico a gas caldo + Manuale Automatic with hot gas system + Manual
Illuminazione / Lighting	2 Led verticali / Vertical	3 Led verticali / Vertical	4 Led verticali / Vertical
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes	Si / Yes
Mensole (LxP) / Shelves (WxD)	N° 5 - mm 610 x 473	N° 10 - mm 551 x 473	N° 10 - mm 551 x 473 laterale / lateral N° 5 - mm 624 x 473 centrale / middle
Piedi-Ruote / Feet-Rollers	4 Ruote / 4 Rollers	4 Ruote / 4 Rollers	8 Ruote / 8 Rollers
Peso Netto-Lordo / Net Weight	Kg 150 / 158,5	Kg 240 / 270	Kg 305 / 355
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290	R290
Assorbimento / Absorption	W 787	W 1517	W 1752
Consumo Energia / Energy Consumption	Kwh/24H 12,7	Kwh/24H 25,8	Kwh/24H 34,3

**MR 75 BT1
FRONTE / FRONT**

**MR 126 BT2
FRONTE / FRONT**

**MR 188 BT3
FRONTE / FRONT**

LATO / SIDE

Dimensioni mm / Dimensions mm

Modello / Model	MR 75 BT1	MR 126 BT2	MR 188 BT3
Dimensioni Esterne (LxPxH) External Dimensions (WxDxH)	750 x 760 x 1997	1253 x 760 x 1997	1880 x 760 x 1997
Dimensioni Imballo (LxPxH) Packaging Dimensions (WxDxH)	775 x 780 x 2090	1278 x 780 x 2090	1905 x 780 x 2090

Dimensioni Interne mm / Inner Dimensions mm

A - Larghezza / Width	630	1133	1760
B - Profondità / Depth	580	530	530
C - Altezza / Height	1538	1554	1554