



FR 200 PS K

Congelatore statico a pozzo porta cieca battente
Static chest freezer with solid hinged lids

- ALU
- Regolatore di temperatura meccanico
- Chiusura a chiave
- 4 ruote



FR 300 PS K

Congelatore statico a pozzo porta cieca battente
Static chest freezer with solid hinged lids

- ALU
- Regolatore di temperatura meccanico
- Chiusura a chiave
- 4 ruote



FR 400 PS K

Congelatore statico a pozzo porta cieca battente
Static chest freezer with solid hinged lids

- ALU
- Regolatore di temperatura meccanico
- Chiusura a chiave
- 4 ruote

Chiave e serratura
Lock and key



Regolatore di temperatura meccanico
Mechanical controller

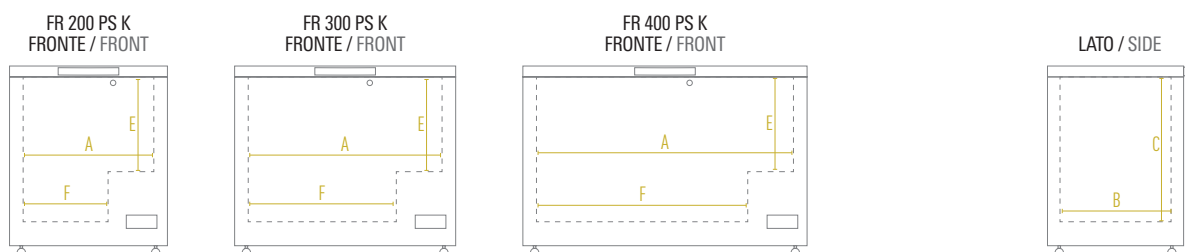


Ruote
Rollers



Caratteristiche / Features

Modello / Model	FR 200 PS K	FR 300 PS K	FR 400 PS K
Temperatura / Temperature Range	-18 °C / -24 °C	-18 °C / -24 °C	-18 °C / -24 °C
Classe Climatica / Climate Class	4	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 177 / 186	Lt. 275 / 288	Lt. 373 / 391
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium
Termometro / Thermometer	Analogico / Analogue	Analogico / Analogue	Analogico / Analogue
Regolatore temperatura / Controller	Meccanico / Mechanical	Meccanico / Mechanical	Meccanico / Mechanical
Spessore isolamento / Insulation thickness	mm 60	mm 60	mm 60
Sbrinamento / Defrost	Manuale / Manual	Manuale / Manual	Manuale / Manual
Illuminazione / Lighting	Si / Yes	Si / Yes	Si / Yes
Chiave e serratura / Lock and key	Si / Yes	Si / Yes	Si / Yes
Piedi-Ruote / Feet-Rollers	4 Ruote / 4 Rollers	4 Ruote / 4 Rollers	4 Ruote / 4 Rollers
Peso Netto-Lordo / Net-Gross Weight	Kg 43 / 48	Kg 50 / 58	Kg 58 / 68
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R600A	R600A	R600A
Assorbimento / Absorption	W 171	W 193	W 257
Consumo Energia / Energy Consumption	KwH/24H 1,95	KwH/24H 2,25	KwH/24H 3,2


Dimensioni mm / Dimensions mm

Modello / Model	FR 200 PS K	FR 300 PS K	FR 400 PS K
Dimensioni Esterne (LxPxH) External Dimensions (WxDxH)	725 x 720 x 845	1015 x 720 x 845	1305 x 720 x 845
Dimensioni Imballo (LxPxH) Packaging Dimensions (WxDxH)	780 x 760 x 990	1070 x 760 x 990	1360 x 760 x 990

Dimensioni Interne mm / Inner Dimensions mm

A - Larghezza / Width	600	890	1180
B - Profondità / Depth	510	510	510
C - Altezza / Height	675	675	675
E - Altezza Minima / Min. Height	445	445	445
F - Larghezza Minima / Min. Width	390	680	970

Dimensioni Personalizzazione (LxH) mm / Sticker Dimensions (WxH) mm

Lato destro / Right side	625 x 487	625 x 487	625 x 487
Lato sinistro / Left side	625 x 750	625 x 750	625 x 750
Frontale / Front	715 x 750	1005 x 750	1295 x 750